



Specifications:


Axial Sensitivity (20±5°C)	~3 pC/g
Measurement Range (Peak Value)	2000 g
Transverse Sensitivity	≤ 5%
Frequency Response (±5%)	2~5000 Hz
Mounting Resonance Frequency	20 kHz
Operation Temp. Range	-40~+150 °C
Temperature Response	Refer to Temp. Curve
Temperature Coefficient	10 mg/°C(0.3Hz)
Magnetic Sensitivity	1 g/T
Base Strain Sensitivity	2 mg/με
Insulation Resistance	≥10 ⁹ Ω
Capacitance	~300 pF
Mounting Method	Adhesive
Sensing Element	PZT-5
Sensing Geometry	Shear
Case Material	Stainless Steel
Weight	2.8 g
Output Type	L5 (top)
Grounding	Signal Ground Connected to Case
Low Noise Cable L5 to BNC	Included
Calibration Certificate	Included

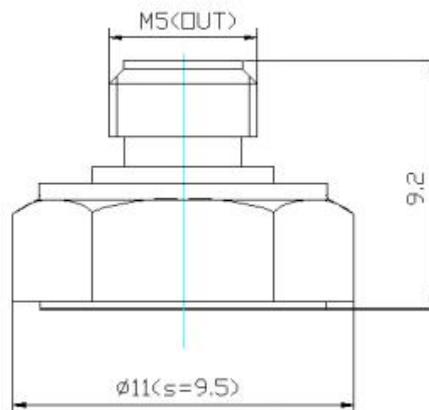

Schematic diagram

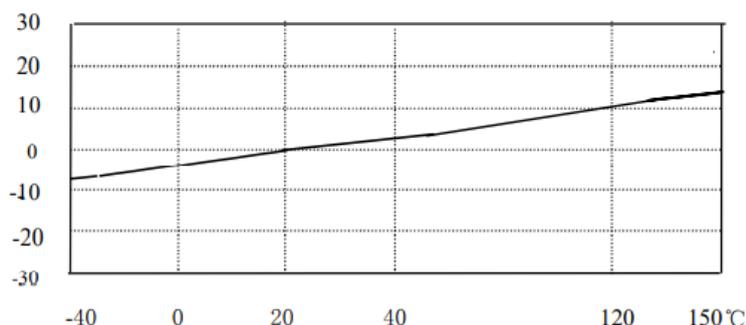

Typical Temperature Response Curve

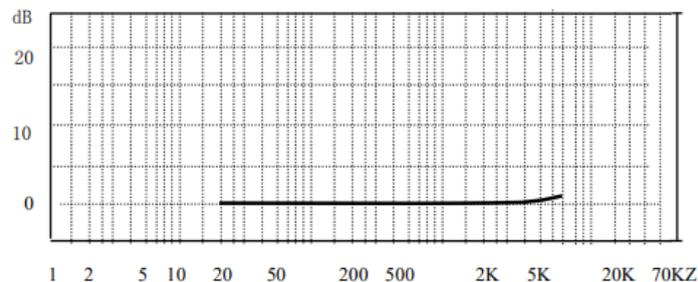

Typical Frequency Response Curve